

HURRICANE

COLD WATER INTAKE


COMMERCIAL SERIES



Scan to view Wall Mount Pressure Washer Spec Sheets

This wall mounted electric pressure washer has many benefits. With a hose reel attached to easily store the 100' steel braided high pressure hose. The auto start/stop switch system makes this machine a great option.

Additional spec information found on page 50.

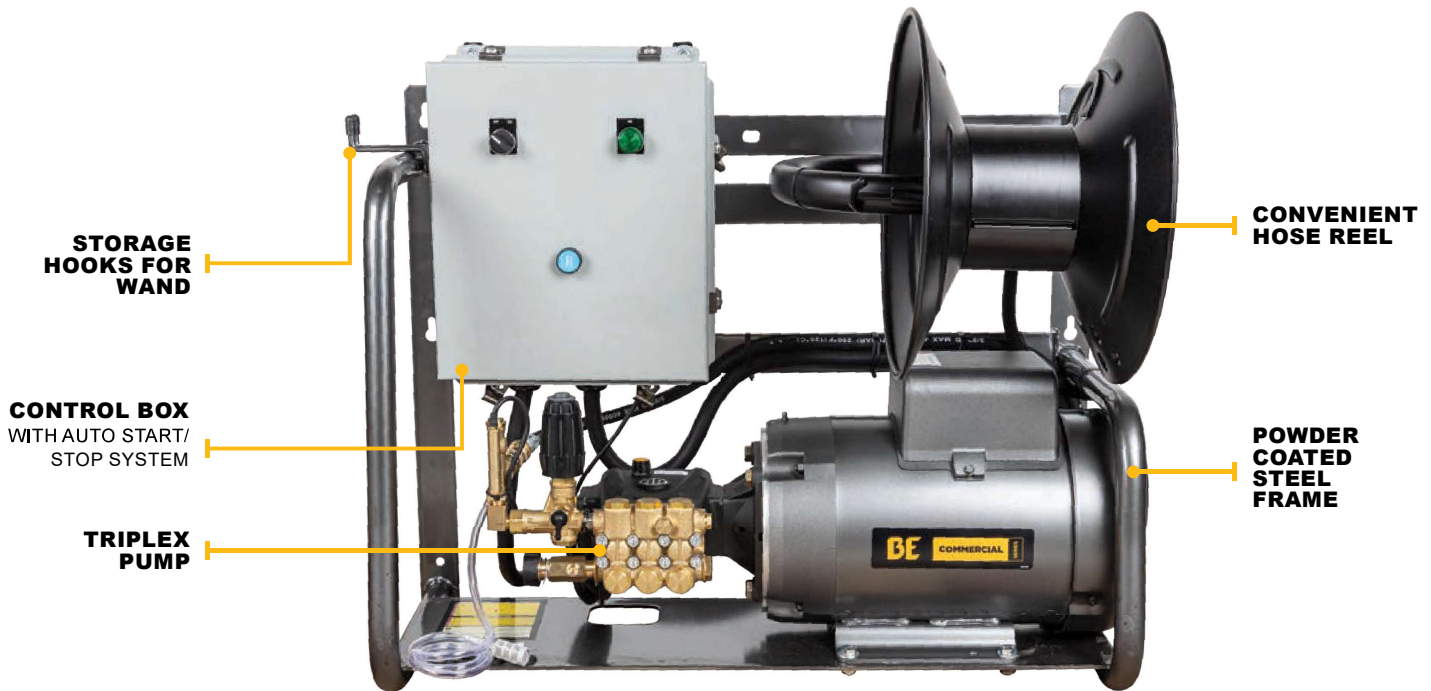

X-2775FW1A



| MODEL # | PSI / GPM | MOTOR TYPE | VOLT | PHASE / AMP / RPM | PUMP / PUMP CLASS | UNLOADER | REEL | MAX TEMP |
|--------------|-------------|------------|------|-------------------|---------------------------------|---------------------|-----------|--------------|
| X-1520FW1ARH | 1,500 / 2.0 | 2.0 HP | 120 | 1 / 17 / 3,450 | AR JRV2G25E 85.129.083B / P5 | Built-In AR43988 | 100' Reel | 60°C / 140°F |
| X-2050FW1A | 2,000 / 4.0 | 5.0 HP | 230 | 1 / 23 / 1,725 | AR RRA35G30E 85.129.017 / P6 | External 85.300.037 | 100' Reel | 60°C / 140°F |
| X-2775FW1A | 3,000 / 4.0 | 7.5 HP | 230 | 1 / 34 / 1,725 | AR RRA35G30E 85.129.017 / P6 | External 85.300.037 | 100' Reel | 60°C / 140°F |

HURRICANE

COMMERCIAL SERIES

HOT WATER INTAKE

This wall mounted electric pressure washer has many benefits including hot water capabilities. With a hose reel attached to easily store the 100' steel braided high pressure hose. The auto start/stop switch system makes this machine a great option.

This unit does not produce hot water. However, it can be fed heated water from an outside source without damaging the pump.

Additional spec information found on page 50.



Scan to view Wall Mount Pressure Washer Spec Sheets



X-1520FW1GENH



| MODEL # | PSI / GPM | MOTOR TYPE | VOLT | PHASE / AMP / RPM | PUMP / PUMP CLASS | UNLOADER | REEL | MAX TEMP |
|-----------------|-------------|------------|------|-------------------|--------------------------------------|---------------------|-----------|--------------|
| X-1520FW1GENH | 1,500 / 2.0 | 2.0 HP | 120 | 1 / 17 / 3,450 | GENERAL ET1505E34H 85.139.074B | External 85.300.003 | 100' Reel | 85°C / 185°F |
| X-2050FW1GENHT | 2,000 / 4.0 | 5.0 HP | 230 | 1 / 23 / 1,725 | GENERAL HTX1812S 85.139.062B / P7 | External AL607EZ | 100' Reel | 85°C / 185°F |
| X-2775FW1GENHT | 3,000 / 4.0 | 7.5 HP | 230 | 1 / 34 / 1,725 | GENERAL T9211 85.129.017 / P6 | External AL607EZ | 100' Reel | 73°C / 165°F |
| X-2050FW3GENHT2 | 2,000 / 4.0 | 5.0 HP | 230 | 3 / 16 / 1,725 | GENERAL HTX1812S 85.139.070B | External AL607EZ | 100' Reel | 85°C / 185°F |
| X-2775FW3GENHT2 | 3,000 / 4.0 | 7.5 HP | 230 | 3 / 20 / 1,725 | GENERAL T9211 85.139.070 | External AL607EZ | 100' Reel | 73°C / 165°F |
| X-2775FW3GENHT4 | 3,000 / 4.0 | 7.5 HP | 460 | 3 / 16 / 1,725 | GENERAL T9211 85.139.070 | External AL607EZ | 100' Reel | 73°C / 165°F |
| X-3010FW3GENHT | 3,200 / 4.0 | 10.0 HP | 575 | 3 / 17 / 1,725 | GENERAL T9211 85.139.070 | External AL607EZ | 100' Reel | 73°C / 165°F |



ELECTRIC PRESSURE WASHER ACCESSORIES

Organized in Alphabetical Order

| MODEL # | HOSE | ACCESSORY KIT | NOZZLES (In Accessories Kit) | FITTINGS | GUN WAND (In Accessories Kit) | UNLOADER | FRAME KIT | INJECTOR SYSTEM | BOX WT |
|-----------------|---|---------------|--|----------|--|---------------------|-------------|---------------------------|---------|
| B1515EN | 25' x 1/4" Steel Braided Rubber 85.225.128 | 85.425.327 | 0°, 15°, 40° & Soaper 85.210.025BEP | M22 | 36" Lance 85.205.050 | Built-In | 85.600.124 | Fixed | 80 lbs |
| B153EA | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.445.200 | 0°, 15°, 40° & Soaper 85.210.045BEP | QC | 36" Insulated Split Lance 85.205.026 | Built-In AR43988 | 85.600.125G | Fixed | 152 lbs |
| B205E34A | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.445.200 | 0°, 15°, 40° & Soaper 85.210.045BEP | QC | 36" Insulated Split Lance 85.205.026 | External 85.300.037 | 85.600.125G | Adjustable | 132 lbs |
| B205EA | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.445.200 | 0°, 15°, 40° & Soaper 85.210.045BEP | QC | 36" Insulated Split Lance 85.205.026 | External 85.300.037 | 85.600.125G | Adjustable | 132 lbs |
| B205EG | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.445.200 | 0°, 15°, 40° & Soaper 85.210.045BEP | QC | 36" Insulated Split Lance 85.205.026 | External 85.300.003 | 85.600.125G | Adjustable | 152 lbs |
| B2775E3AHE | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.445.200 | 0°, 15°, 40° & Soaper 85.210.045BEP | QC | 36" Insulated Split Lance 85.205.026 | External 85.300.037 | 85.600.125G | Adjustable | 152 lbs |
| B2775EA | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.445.200 | 0°, 15°, 40° & Soaper 85.210.045BEP | QC | 36" Insulated Split Lance 85.205.026 | External 85.300.037 | 85.600.125G | Adjustable | 152 lbs |
| B3010E34AHE | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.445.200 | 0°, 15°, 40° & Soaper 85.210.045BEP | QC | 36" Insulated Split Lance 85.205.026 | External 85.300.037 | 85.600.125G | Adjustable | 203 lbs |
| P1515EPN | 25' x 1/4" Thermoplastic 85.225.229N | 85.400.320 | Variable Nozzle 85.210.003 | M22 | 36" Lance 85.205.050 | Built-In | N/A | Fixed | 52 lbs |
| P1515EPNW | 50' x 1/4" Steel Braided Rubber 85.225.128 | 85.400.324 | 0°, 15°, 40° & Soaper 85.210.025BEP | M22 | 36" Lance 85.205.050 | Built-In | N/A | Fixed | 92 lbs |
| P1715EN | 20' x 1/4" PVC 85.225.229N, 85.300.159 Adapter (x2) | N/A | 15° 85.216.020 | M22 | 25', 140°F at 3000 PSI Gun Wand 85.205.050, 85.300.149 Adapter | Built-In | N/A | High Pressure Foam Cannon | 19 lbs |
| P1915EN | 20' x 1/4" PVC 85.225.229N, 85.300.159 Adapter (x2) | N/A | 15° Rotary Turbo Nozzle 85.216.020, RJ-3030-CS | M22 | 25', 140°F at 3000 PSI Gun Wand 85.205.050, 85.300.149 Adapter | Built-In | N/A | High Pressure Foam Cannon | 29 lbs |
| P2115EN | 25' x 1/4" PVC 85.225.229N, 85.300.159 Adapter (x2) | N/A | 15°, 25°, Rotary Turbo Nozzle 85.216.020, 85.226.020, RJ-3030-CS | M22 | 25', 140°F at 3000 PSI Gun Wand 85.205.050, 85.300.149 Adapter | Built-In | N/A | High Pressure Foam Cannon | 33 lbs |
| P2314EN | 25' x 1/4" PVC 85.225.229N, 85.300.159 Adapter (x2) | N/A | 0°, 15°, 25°, 40°, Rotary Turbo Nozzle 85.210.025BEP, RJ-3030-CS | M22 | 25', 140°F at 3000 PSI Gun Wand 85.205.050, 85.300.149 Adapter | Built-In | N/A | High Pressure Foam Cannon | 45 lbs |
| P2317EN | 25' x 1/4" Thermoplastic 85.225.229N | N/A | 0°, 15°, 25°, 40°, Rotary Turbo Nozzle 85.210.025BEP, RJ-3030-CS | QC | 36" Lance 85.205.050 | Built-In | N/A | High Pressure Foam Cannon | 42 lbs |
| P2713EN | 25' x 1/4" Thermoplastic 85.225.229N | N/A | 0°, 15°, 25°, 40°, Rotary Turbo Nozzle 85.210.025BEP, RJ-3030-CS | QC | 36" Lance 85.205.050 | Built-In | N/A | High Pressure Foam Cannon | 57 lbs |
| PE-1115EW1A | 25' x 1/4" Steel Braided Rubber 85.225.228 | 85.440.200S | 0°, 15°, 40° & Soaper 85.210.040BEP | QC | 36" Insulated Split Lance 85.205.026 | Built-In AR43988 | 85.600.124 | Fixed | 90 lbs |
| PE-1520EP1COMH | 25' x 1/4" Steel Braided Rubber 85.225.228 | 85.435.200S | 0°, 15°, 40° & Soaper 85.210.035BEP | QC | 36" Insulated Split Lance 85.205.026 | Built-In AR43988 | 85.600.013 | Fixed | 76 lbs |
| PE-1520EW1A | 25' x 1/4" Steel Braided Rubber 85.225.228 | 85.435.200S | 0°, 15°, 40° & Soaper 85.210.035BEP | QC | 36" Insulated Split Lance 85.205.026 | Built-In AR43988 | 85.600.124 | Fixed | 90 lbs |
| X-1520FW1ARH | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.435.200 | 0°, 15°, 40° & Soaper 85.210.035BEP | QC | 36" Insulated Split Lance 85.205.026 | Built-In AR43988 | 85.600.111 | Adjustable | 220 lbs |
| X-1520FW1GENH | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.435.200 | 0°, 15°, 40° & Soaper 85.210.035BEP | QC | 36" Insulated Split Lance 85.205.026 | External 85.300.003 | 85.600.111 | Adjustable | 220 lbs |
| X-2050FW1A | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.445.200 | 0°, 15°, 40° & Soaper 85.210.045BEP | QC | 36" Insulated Split Lance 85.205.026 | External 85.300.037 | 85.600.112 | Adjustable | 260 lbs |
| X-2050FW1GENHT | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.455.200 | 0°, 15°, 40° & Soaper 85.210.055BEP | QC | 36" Insulated Split Lance 85.205.026 | External AL607EZ | 85.600.112 | Adjustable | 260 lbs |
| X-2775FW1A | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.445.200 | 0°, 15°, 40° & Soaper 85.210.045BEP | QC | 36" Insulated Split Lance 85.205.026 | External 85.300.037 | 85.600.112 | Adjustable | 310 lbs |
| X-2775FW1GENHT | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.450.200 | 0°, 15°, 40° & Soaper 85.210.050BEP | QC | 36" Insulated Split Lance 85.205.026 | External AL607EZ | 85.600.112 | Adjustable | 310 lbs |
| X-2050FW3GENHT2 | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.455.200 | 0°, 15°, 40° & Soaper 85.210.055BEP | QC | 36" Insulated Split Lance 85.205.026 | External AL607EZ | 85.600.112 | Adjustable | 260 lbs |
| X-2775FW3GENHT2 | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.450.200 | 0°, 15°, 40° & Soaper 85.210.050BEP | QC | 36" Insulated Split Lance 85.205.026 | External AL607EZ | 85.600.112 | Adjustable | 310 lbs |
| X-2775FW3GENHT4 | 50' x 3/8" Steel Braided Rubber 85.238.153 | 85.450.200 | 0°, 15°, 40° & Soaper 85.210.050BEP | QC | 36" Insulated Split Lance 85.205.026 | External AL607EZ | 85.600.112 | Adjustable | 310 lbs |
| X-3010FW3GENHT | 100' x 3/8" Steel Braided Rubber 85.238.111 | 85.445.200 | 0°, 15°, 40° & Soaper 85.210.045BEP | QC | 36" Insulated Split Lance 85.205.026 | External AL607EZ | 85.600.112 | Adjustable | 380 lbs |

ACCESSORY KIT INCLUDES 85.609.006 MANUAL | ALL EXTERNAL UNLOADERS ARE EQUIPPED WITH A 36" DOUBLE-LOOP BYPASS HOSE